SHOWER Ceiling-Mount Shower System w/Diverter Valve **AQ5.000A-LM40S** 










#### Information

- Wall-mounted, battery-powered controller and holder; controls LED chromotherapy lighting
- Rainfall, rain curtain and cascade water functions
- No-clog, easy-clean spray nozzles
- Showerhead flow rate  $\leq$ 2.5 gpm
- Includes trim plate & handle and diverter valve
- ADA



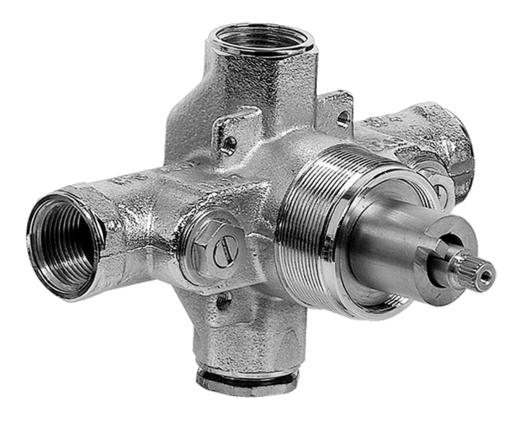


#### Information

- 18.4 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Built-in service stops
- Complete serviceability from front of all units
- Supplied with protective plastic cover
- Thermostatic valve uses a paraffin wax cartridge



SHOWER Immersion SOLID Trim Plate w/Handle G-8041-LM40S-T




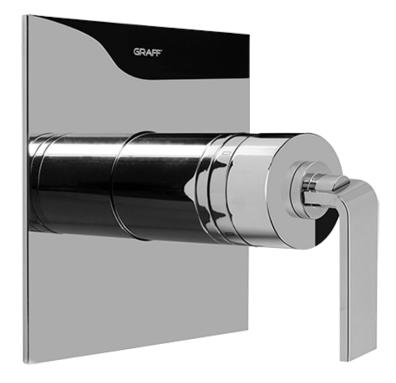


#### Information

- Single metal handle
- Decorative trim plate
- Use with G-8000 or G-8005 thermostatic rough valve
- To complete package, you must order rough valve
- ADA





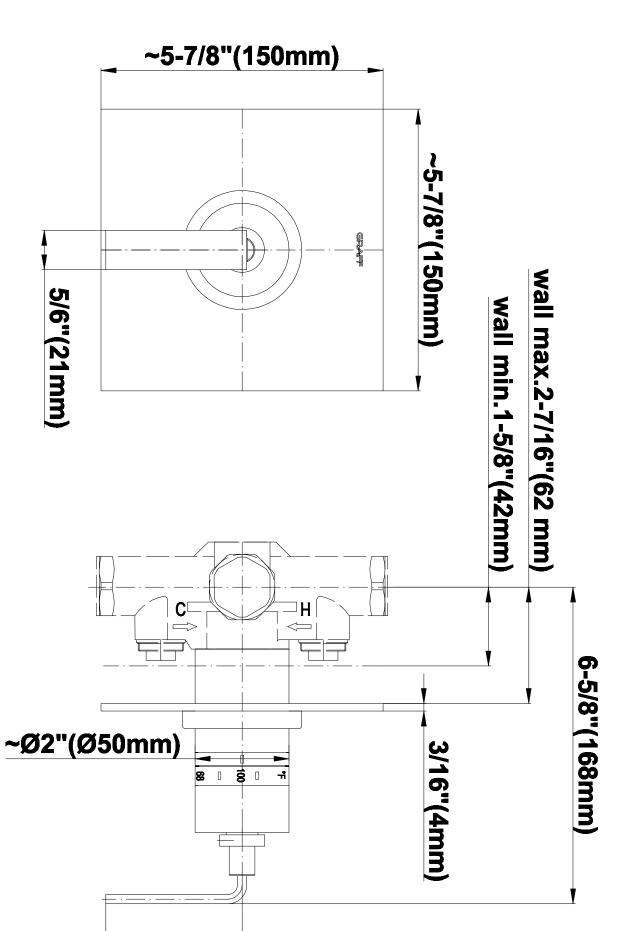



### 2-7/8"(72.5mm)

#### SHOWER 3-Way High Flow Transfer Rough Valve WITH off function **G-8050**





#### Information


- Intended for use with Thermostatic Shower Systems
- 1/2" 3-way diverter valve with 3 outlets and off function
- Universal inlets/outlets with female threads
- Operates one function at a time
- Supplied with protective plastic cover
- CALGreen compliant depending on functions
- CALGreen


#### Finishes



Polished Chrome

## **G-8050**

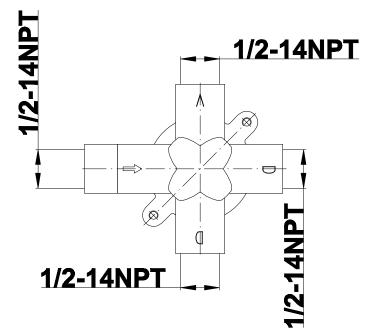

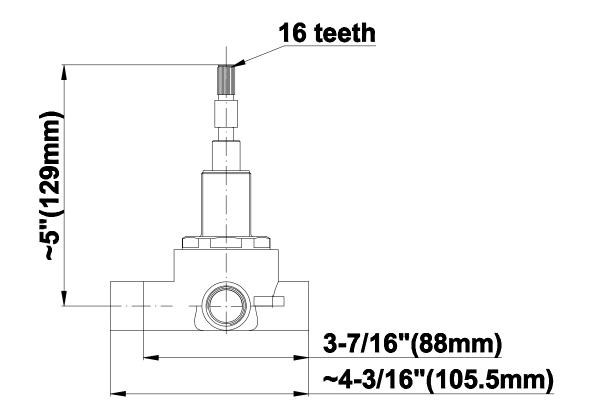








#### Information

- Single metal lever handle
- Decorative trim plate WITH off function
- Use with G-8050 (4-port thermostatic diverter valve w/stop)
- To complete package, you must order rough diverter valve
- ADA



# **G** - 8066

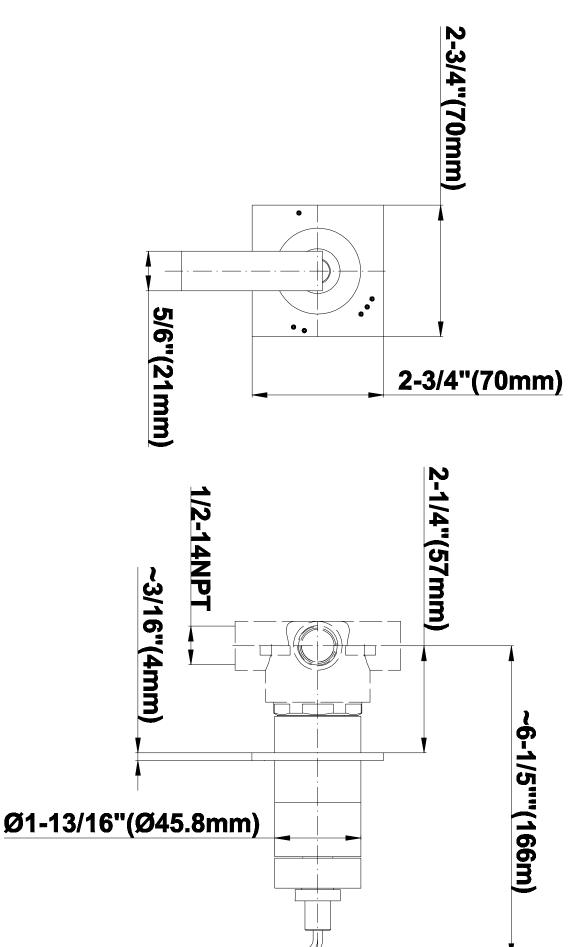


n c





SHOWER Ceiling-Mount Showerhead System **G-8221** 



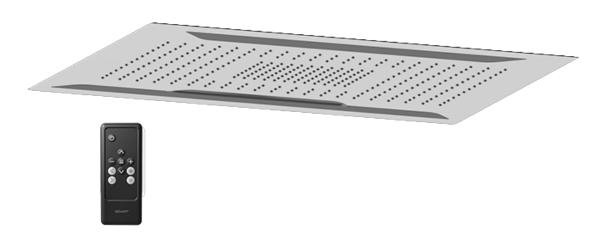

#### Information

- Rainfall, rain curtain and cascade water functions
- 6-color LED chromotherapy lighting
- · Battery powered LED controller with wall-mounted holder
- No-clog, easy-clean spray nozzles
- Showerhead flow rate  $\leq$  1.8 max gpm
- CALGreen





									ii:											
٠		٠		.*	٠	1.5		.*		. *			٠	٠	٠		٠		٠	
•			÷.			1		85	12		12		1				•	•		
	12			1	1	2	•			12	۰.	۰.		•						1. Sec. 1. Sec
3	1			1	12					-						•	•		•	•
			٠÷.	5	1			22	32	2.2	20	22	ୁ	21					•	
•		•										. •	• •					•	•	
				1	1		22		12	2.2	23	12	2.3				٠.		•	
	٠ <b>٠</b> .			8	23			1.1	22	22	20	12	2.2		•		•		•	
	۰.	•							1.5				* *		•	•	•			
•			S. 7.		65.		**			••		98	•.•			•	٠		•	
2	12	12		e.											1	10		85.	- 5	0.000
2	- 21			2	φ.	22	- 21	- 21	2	82	÷.	2	2	12		12	÷.		12	
٠	٠	•	٠	•			•		•	•	•	*	•	•	•	•	•	٠	•	•
					4	-	-		-		-		-	-						

#### Product Features

- Rainfall, rain curtain and cascade water functions
- 6-color LED chromotherapy lighting
- Battery powered LED controller
  with wall-mounted holder
- No-clog, easy-clean spray nozzles
- Showerhead flow rate ≤ 1.8 max gpm

#### Available Finishes

• Stainless Polished G-8221-SP

#### Code Compliance

CALGreen

#### Warranty

Limited lifetime warranty

For complete warranty information go to https://www.graff-faucets.com/en/info/faqs

17-11/16" (450 mm)

#### 23-5/8" (600 mm)

The measurements shown are for reference only. Products and specifications shown are subject to change without notice. Revised 1/2018 www.graff-designs.com | phone: 800-954-4723