

# MOEN®

# SPECIFICATIONS

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- Brass swivel ball assembly

## OPERATION

- Self pressurizing design that provides strong performance regardless of line pressure
- Single spray function

## FLOW


- Showerhead is designed to deliver 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 2.0 gpm (7.6 L/min) max for products manufactured prior to June 30, 2018. EP suffix models manufactured after June 30, 2018 are limited to 1.75 gpm (6.7 L/min) max.

## STANDARDS

- Third party certified to CSA B125.1/ASME A112.18.1 and all applicable requirements referenced therein

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations




## GREENFIELD™

6-3/4" Rainfall Showerhead

**MODELS:** S178Series

**IMMERSION™**  
rainshower technology

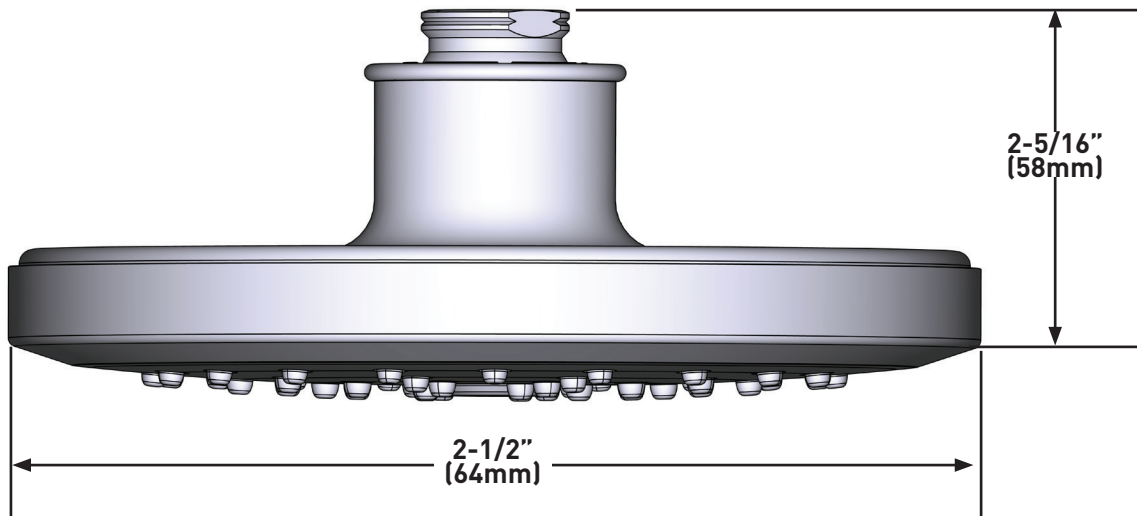

**CRITICAL DIMENSIONS** DO NOT SCALE