

Thermostatic Mixing Valve with Two-Way Diverter Trim - Round

FEATURES

- For use with MiniUnit™ (TBN01001U) Valve
- Unobtrusive twist assist for a clean aesthetic
- Meets 2018 California water efficiency appliance CEC regulations
- Thin escutcheon at approximately 10 mm
- Temperature control trim with anti-scald safety top
- ASSE certified Safety Thermo™ (SMA) Thermostatic Mixing Valve

COLORS/FINISHES

- #CP Polished Chrome
- #PN Polished Nickel
- #BN Brushed Nickel

CODES/STANDARDS

- Meets or exceeds ASSE 1016/ASME A112.1016/CSA B125.16, ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, CEC and others
- Complies with CA Prop 65 warning requirements



PRODUCT SPECIFICATION

Product shall be TOTO Model TBV01408U# ____.
Product shall require TBN01001U MiniUnit (sold separately). Product shall be a temperature control valve and trim with anti-scald safety stop. Product shall be ASSE certified.



 **Safety Thermo™ (SMA)**

TBV01408U


Thermostatic Mixing Valve with Two-Way Diverter Trim - Round

SPECIFICATIONS

Material	Brass
Warranty	Limited Lifetime for Residential Use One Year for Commercial Use
Shipping Weight	5.9 lbs
Shipping Dimensions	12" x 8-1/2" x 6-3/8"

INSTALLATION NOTES

Requires TBN01001U MiniUnit (sold separately).

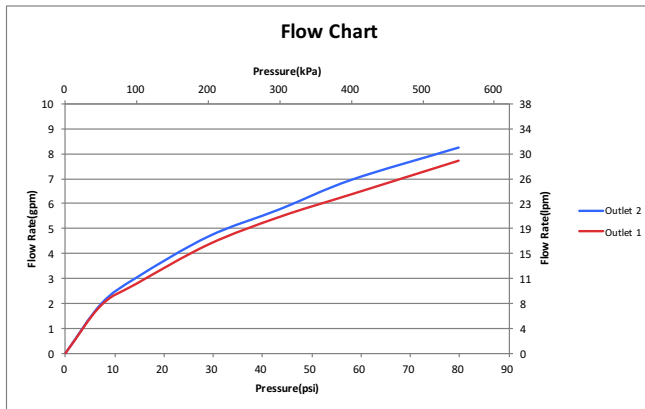

DIMENSIONS

